








AWP1000

Push-Around Vertical Lifts

AWP8-1000 / AWP10-1000 / AWP12-1000 / AWP14-1000

	AWP8-1000	AWP10-1000	AWP12-1000	AWP14-1000
 S.W.L	150kg	150kg	150kg	136kg
 Working height	8.00m	10.00m	12.00m	14.00m
Platform floor height	6.00m	8.00m	10.00m	12.00m
 Overall Length(stowed)	1.37m	1.37m	1.41m	1.46m
Overall Length(tilted back)	/	/	/	3.13m
Overall width	0.75m	0.75m	0.75m	0.75m
Overall height(stowed)	1.97m	1.97m	1.97m	2.75m
Overall height(tilted back)	/	/	/	1.98m
Outrigger footprint(l/w)	1.75/ 1.55m	1.75/ 1.55m	1.75/ 1.55m	2.26/ 2.06m
Platform size	0.69x0.66m	0.69x0.66m	0.69x0.66m	0.69x0.66m
Ground clearance	0.05m	0.05m	0.05m	0.05m
 Tyres				
Back wheels	8in	8in	8in	8in
Front wheels	5in	5in	5in	5in
 Weight	328kg(AC)/	376kg(AC)/	420kg(AC)/	492kg(AC)/




Forklift pockets



Leveling indicator




Emergency lowering system

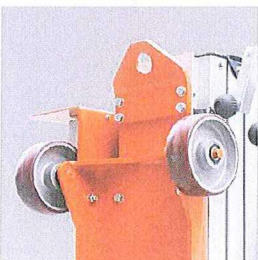

Crane attachment point



Mast cover

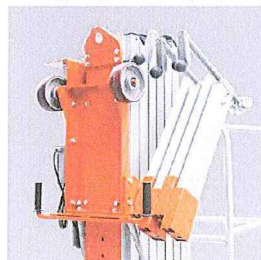

Outrigger storage sockets


Standard equipment

- Leveling outrigger device
- Emergency stop button
- Easy loading in pickup trucks
- Two controllers operation
- Emergency down button
- Leveling indicator
- Forklift pockets
- Transport tie hole
- Tilt back frame(Only for AWP14-1000)

Options

- DC power with charger
- Overload sensor
- AC power to platform
- Motion alarm
- Beacon




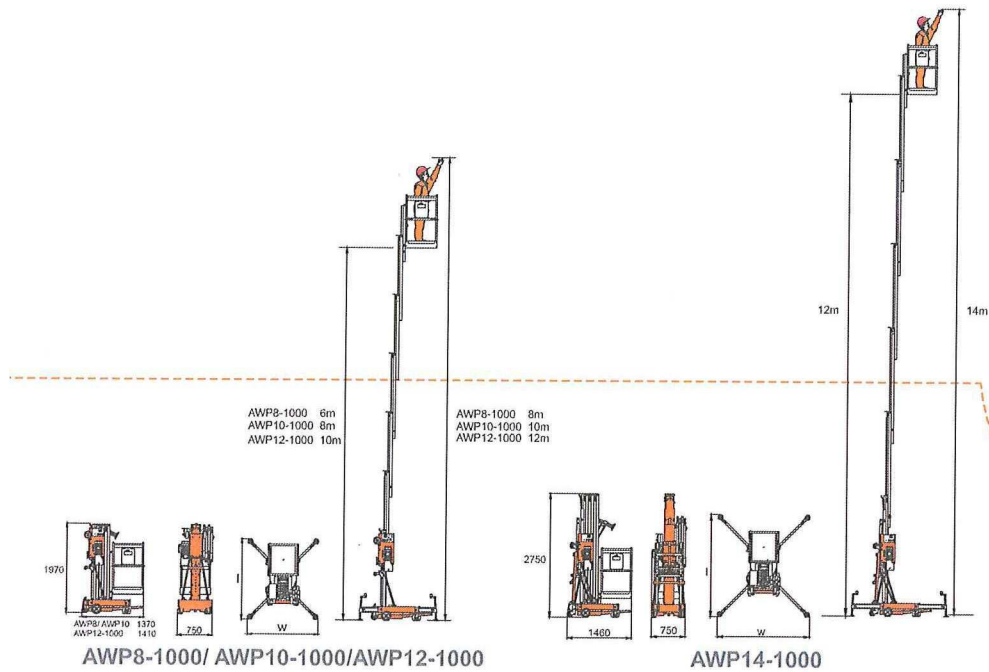

Tilt back frame



Outriggers with interlock

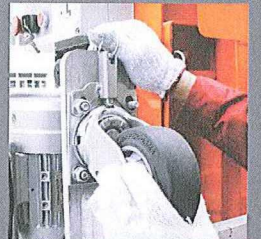

Lockable castor



Adjustable pickup rail



Ground control with outrigger LEDs