

LGMG Telescopic Boom Lift

SPECIFICATIONS


MODELS	T22J (T72J)	
Measurements	Metric	US
Work Height Max.	23.8m	78ft
Platform Height	21.8m	71.5ft
Horizontal Outreach	17.5m	57.4ft
Below Ground Reach	2.3m	90.5in
Platform Length	2.44m	96in
Platform Width	0.9m	35in
Platform Capacity	300kg(unrestricted) 450kg(restricted)	661lbs(unrestricted) 992lbs(restricted)
A Stowed Length	10.6m	417in
B Overall Width	2.49m	98in
C Stowed Height	2.79m	110in
D Wheelbase	2.51m	99in
E Ground Clearance	0.395m	15.5in

PRODUCTIVITY		
Max. Platform Occupants	2(300kg) / 3(450kg)	2(661lbs) / 3(992lbs)
Turntable Rotation	360° continuous	360° continuous
Turntable Tailswing	1.2m	3.9ft
Drive Speed-Stowed	4.8km/h	3mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability-Stowed	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	2.5m	8.1ft
Turning Radius-Outside	5.5m	17.8ft
Max.Slope	4.5° / 4.5°	4.5° / 4.5°
Drive Mode	4W Drive,FWS	4W Drive,FWS
Tires Type	RT Foam-filled	RT Foam-filled
Tires Size	355/55D 625	355/55D 625


POWER		
Power	Deutz D 2.9L4	Deutz D 2.9L4
Fuel Tank Capacity	100L	26.4gal

HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	180L	47.5gal

WEIGHT		
Machine Weight	12300kg	27117lbs

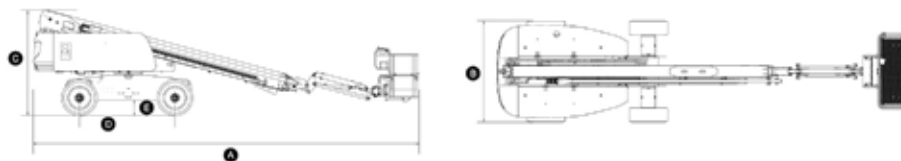

T22J (T72J) WORKING RANGE

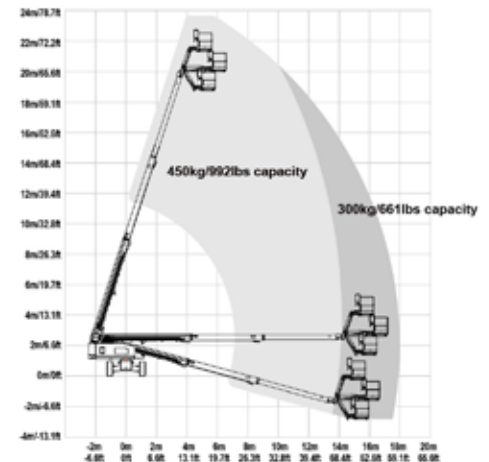

STANDARD FEATURES

- Proportional control
- Overload sensing system
- Descent alarm with flashing beacon
- Platform auto-leveling system
- Emergency stop button
- On-board diagnostic system
- Oscillating axle
- 4W drive and 4W break
- Over tilt protection system
- Anti-entrapment protection
- Platform control unit cover
- Hydraulic oil automatic cooling system

OPTIONAL

- AC power to platform
- Platform tool box
- Telematics
- Hydraulic generator
- Non-marking tires
- Solid tires
- Euro V engine
- T4F engine

Machines in compliant with EN280 / ANSI 92.20 Standard.

Specifications subject to change without notice. Photos and diagrams in the page are for promotional purposes only. 2021 V1 Version