

GIANT

Team TOBROCO

Industrielaan 2, 5061 KC Oisterwijk

Tel.: +31 (0)13-5211212

Fax: +31 (0)13-5234045

Internet: www.tobroco-giant.com

E-Mail: info@tobroco.com



3648 TENDO
4548 TENDO HD

TENDO

A compact, multifunction jack of all trades




3648 TENDO - 4548 TENDO HD

VERSATILE AND COMPACT

Our wide range includes several unique GIANTS, including 2 TENDO machines. The TENDO is very compact and built to maneuver in small spaces and on rough terrain. Want to experience the feeling of a GIANT yourself? Please contact a GIANT dealer in your area.






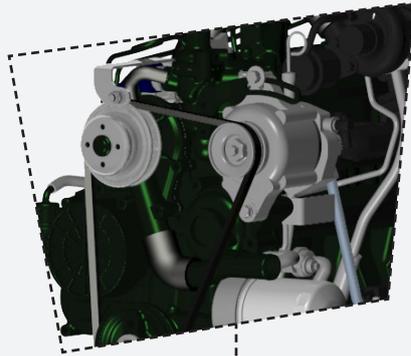

KUBOTA ENGINE

Excellent quality that guarantees durability and one of the quietest in its class.

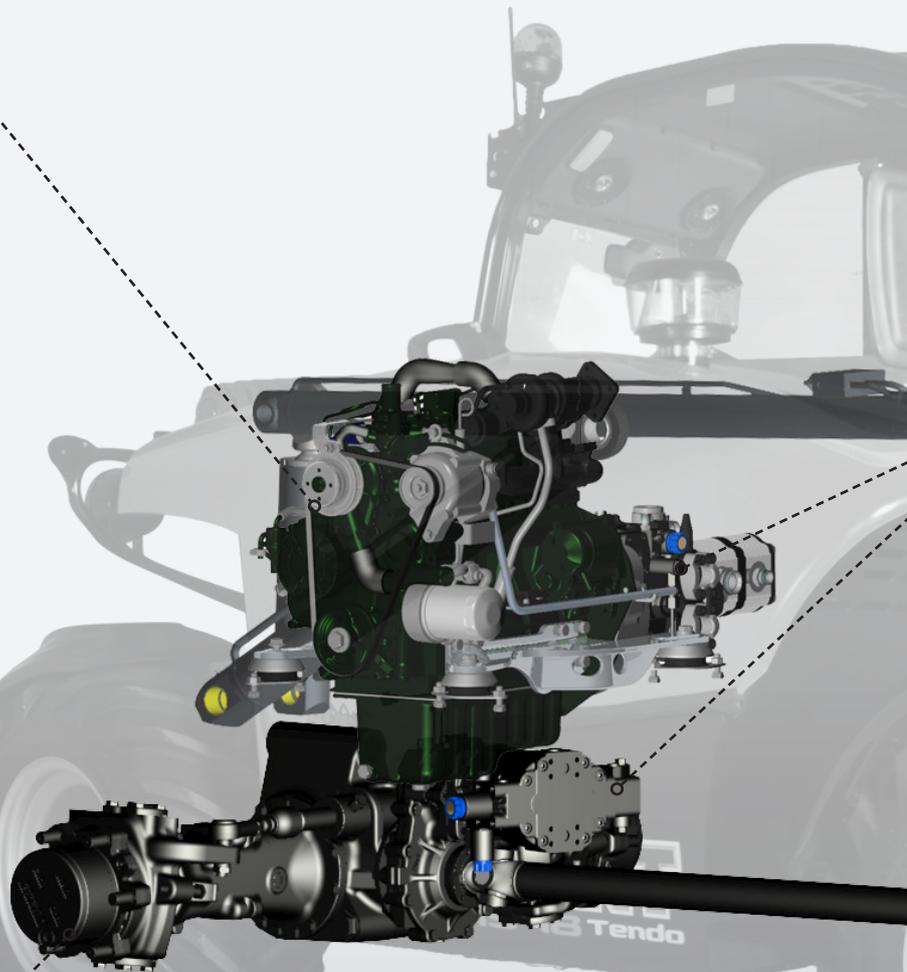


CARRARO

Steady, compact and reliable axles from a reputable brand.

QUALITY IS ON THE INSIDE

The core of the TENDO consists of high quality components from top brands such as Kubota, Bosch Rexroth and Carraro. Through intensive collaboration with these parties optimal advances performance are 'extracted' from each part.

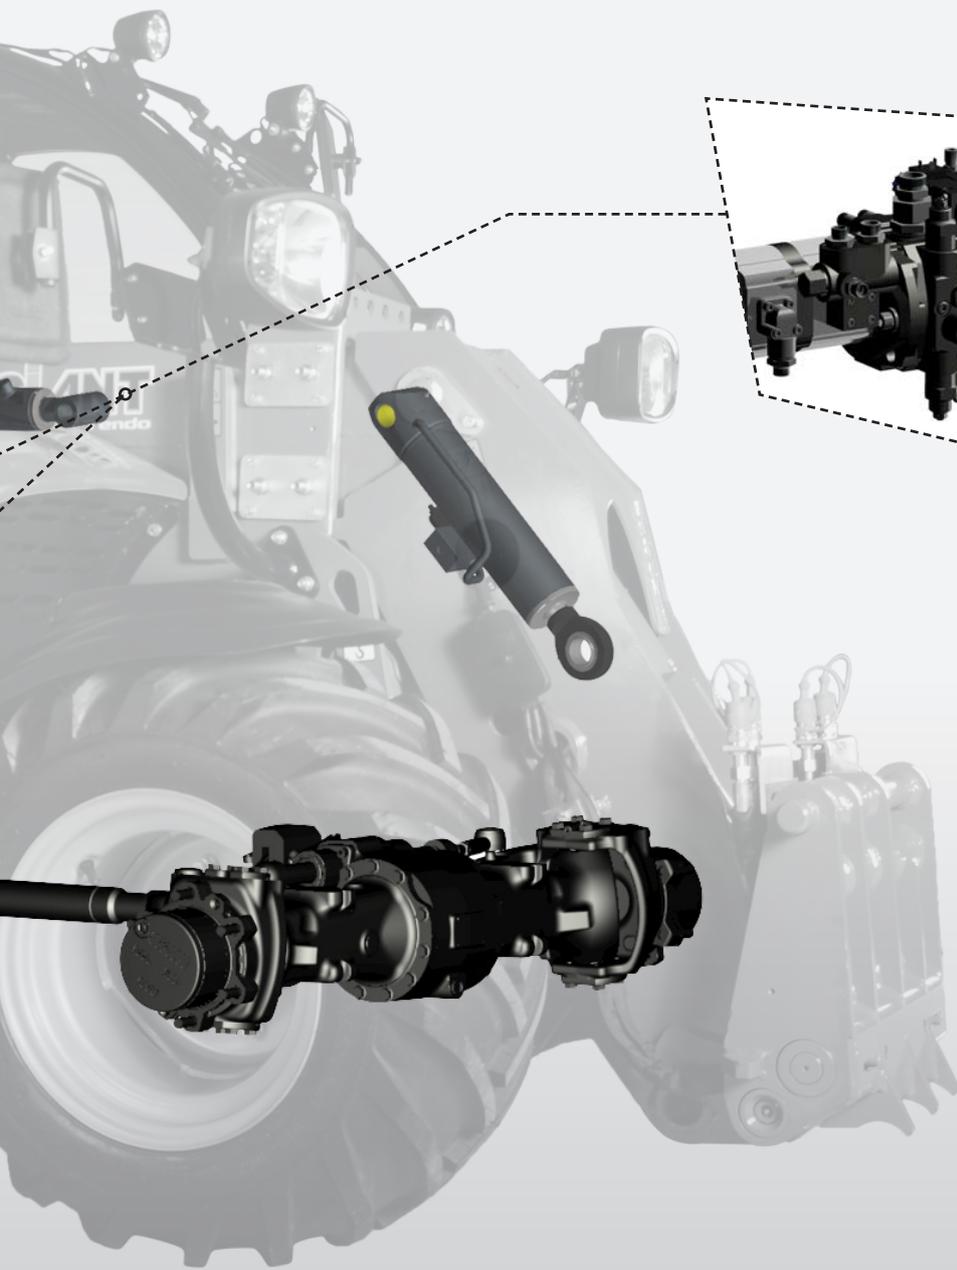

BOSCH REXROTH
Hydraulic pump and
-motor ensure efficiency,
power and comfort.

SMART COMMUNICATION SYSTEM

Because the TENDO is equipped with a smart communication system, diagnosing and repairing faults is much easier. In addition, this provides the capability for additional options.



SPACIOUS & COMPACT

The spacious cab with curved windscreen provides a good field of view. You have 360 degree vision. For even better visibility choose the optional extra exterior mirror.



Broad operational view

Broad operational view



The TENDO is extremely compact. It is narrower and less than two meters high. As a result, it manoeuvres easily in all kinds of areas.






1. Spacious cabin



2. Language settings



3. Dashboard

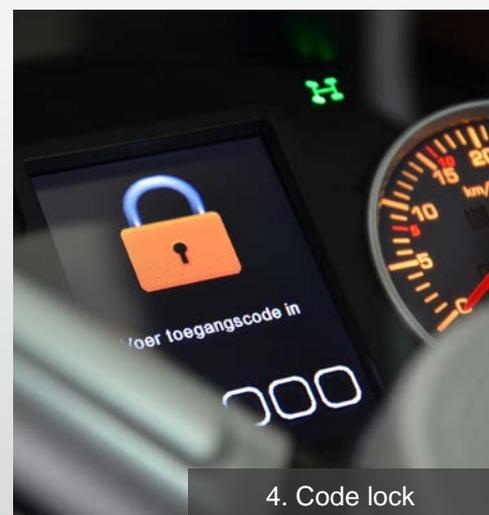

4. Code lock



5. Touchpad



Discover the optional
proportional joystick on our
website. Visit:
www.tobroco-giant.com

MANY CONVENIENCES

1. Spacious cab with good visibility
2. Choice of multiple languages.
3. A clear and elegant dashboard.
4. Secure TENDO with a code lock. (Option)
5. The main functions with one button press.

A WIDE RANGE

TOBROCO-GIANT offers a wide range of unique wheel loaders. Flexible, powerful and adjusted as desired for small and large operations.



	3648 TENDO	4648 TENDO HD
Engine	4 cylinder Kubota 36 hp / 26 kW	4 cylinder Kubota 45 hp / 33 kW
Service weight	2.950 kg	2.950 kg
Drive hydraulics	Hydrostatic automotive	Hydrostatic automotive HD (Heavy Duty)
Driving speed	0-10 km/h / 0-25 km/h	0-10 km/h / 0-25 km/h
Drive	Planetary axles	Planetary axles HD (Heavy Duty)
Differential lock	Electrically controlled (option)	Electrically controlled (option)
Standard tires	10.0/75-15.3 AS (160 cm machine) width)	10.0/75-15.3 AS (160 cm machine) width)
Service brake	Hydraulically operated disk brake	Hydraulically operated disk brake
Parking brake	Disk brake	Disk brake
Quick change	GIANT STANDARD Hydraulic	GIANT STANDARD Hydraulic
Drive hydraulics	84 L/min (350 bar)	84 L/min (450 bar)
Working hydraulics	51 L/min (230 bar)	51 L/min (230 bar)
Lifting capacity	1.400 kg	1.400 kg


ndelen Dealers Contact Actueel Vacatures



For more information, please refer to www.tobroco-giant.com
Don't miss out on all the latest news. Subscribe for the newsletter.

Data is subject to change.




TECHNICAL SPECIFICATIONS

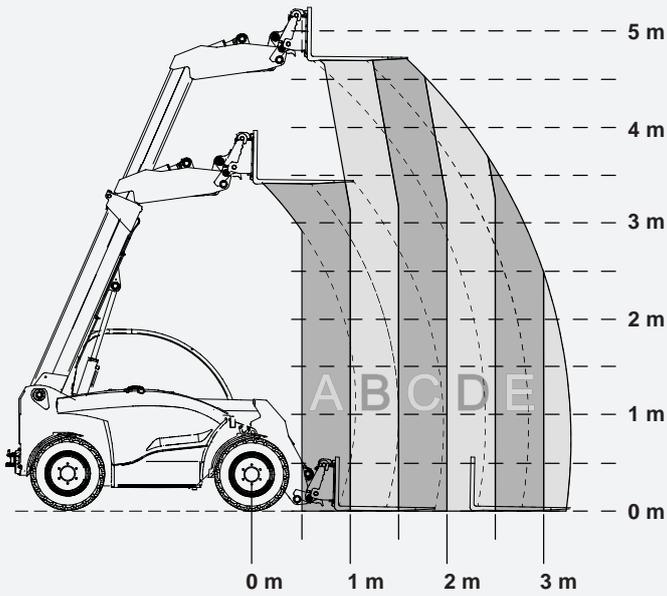

TIPPING LOADS

Standard version	A	B	C	D	E
Tipping load (kg)	1.735	1.165	900	395	330
Lifting capacity (kg)	2.490	1.670	1.255	700	585


With counter weight (Option)	A	B	C	D	E
Tipping load (kg)	2.115	1.420	1.090	550	460
Lifting capacity (kg)	2.870	1.925	1.445	855	710

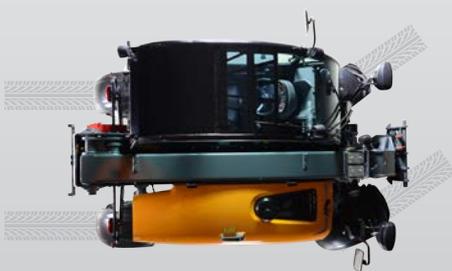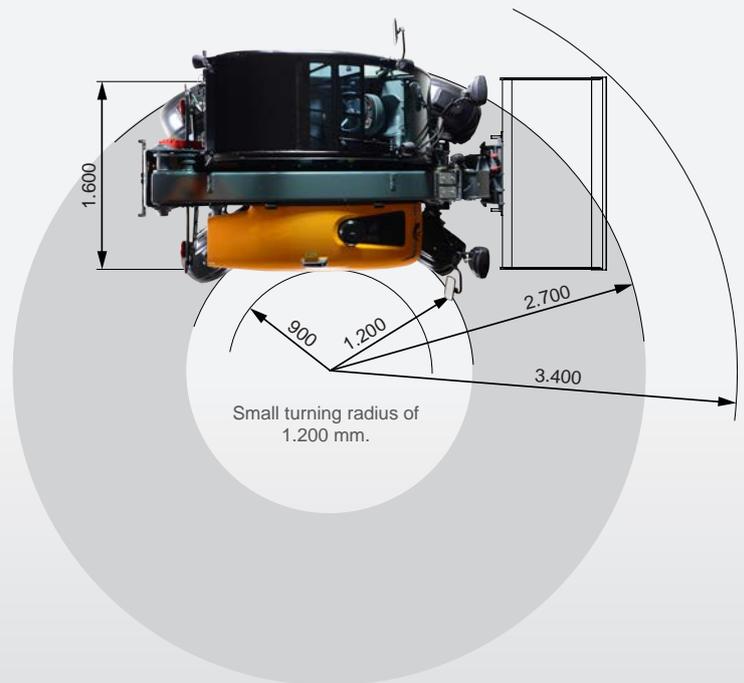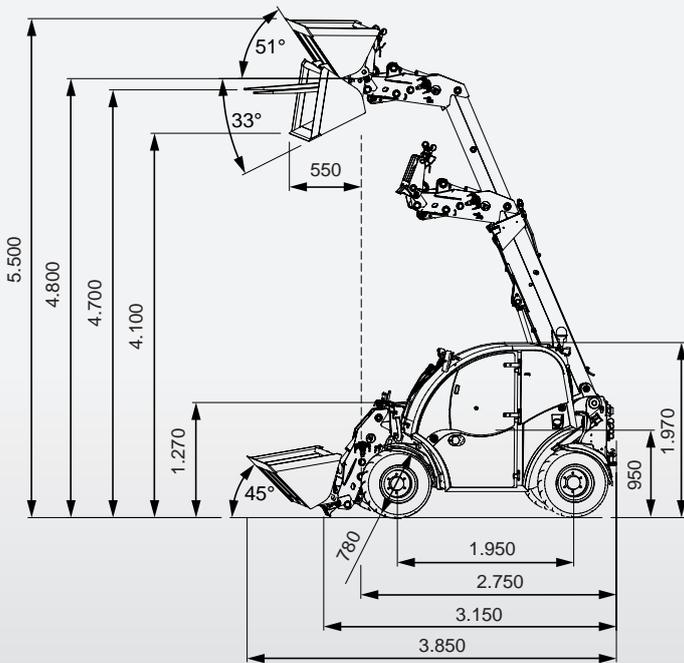

Two-wheel steering
Makes it possible to drive steady and steer accurately.



Four-wheel steering
Very maneuverable in smaller areas due to the small turning radius.

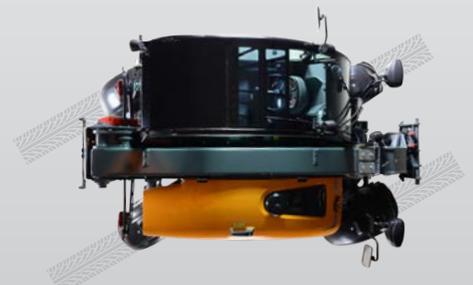

Crab steer
Easy to drive closely to the wall.

Data is subject to change.
Sizes in mm.

COMPLETE

Optimally composed for your convenience. Every detail counts: comfort, safety and ease of use are the core values of the GIANT machines.



DRIVING COMFORT

Choice of tires for various types of terrain. Consult your dealer which tire is best suited for your working situation.

31x15.5-15 AS
(80 x 37 cm)



31x15.5-15 SKID
(80 x 40 cm)



31x15.5-15 TR-06
(80 x 40 cm)



425/40B17 GSP
(80 x 43 cm)



10.0/75-15.3 AS
(76 x 26 cm)



ATTACHMENT BRACKET

Thanks to the GIANT's attachment bracket, you can easily and quickly swap your attachments. Caution! In order to offer you even better customer service, we also offer multiple attachments. Ask your dealer for the GIANT conditions.



GIANT STANDARD
(HYDRAULIC)

SERVICE & MAINTENANCE

The TENDO is a machine that is easy to maintain properly. Under the bonnet you will find a very compact engine compartment where everything is easy to reach.



The engine compartment of the TENDO models are very accessible for daily checks of the oil, coolant and air filter.

OPTION: Even more functionality with a three-point hitch behind the machine!

MULTIFUNCTIONAL

GIANT offers hundreds of attachments, which allows the use of the TENDO for many more applications than you would think at first.



WWW.GIANT-ATTACHMENTS.COM



WWW.TOBROCO-GIANT.COM



TOBROCO-GIANT

Industrielaan 2,

5061 KC Oisterwijk (Netherlands)

Tel.: +31 (0)13-5211212

Fax: +31 (0)13-5234045

Internet: www.tobroco-giant.com

E-Mail: info@tobroco.com

All technical data in this brochure refer to under Central European operating conditions tested series models and describe the standard functions. Specifications and their modes of operation, as well as accessories, depend on the model and the options of the product, as well as country-specific regulations in the country of sale. Images may show non-listed or non-standard available products. The descriptions, illustrations, weights and technical data are not binding and are in accordance with the state of the art at the time of going to press. Changes in the design, equipment, optics and technology are due to the continuous development of its products without prior notice. Do you need special functions which are only available through the use of additional components and / or under special circumstances, please contact us! We will be happy to answer your questions and let you know whether and under what conditions regarding the product and the environmental conditions special functions are realizable. When doubts about the capacity or the performance of our products under special circumstances, we recommend to perform under controlled conditions. Testing activities despite the utmost care, we can not rule out deviations from illustrations or dimensions, calculation errors, misprints or omissions in this brochure. We therefore accept no liability for the correctness and completeness of the information contained in this brochure. As part of our General Terms and Conditions, we guarantee the proper functioning of our products. Furthermore Linear guarantees we provide in principle. A further liability than outlined in our Terms and Conditions is excluded.